

Culvert Fishway Planning and Design Guidelines

Part A – About These Guidelines



Ross Kapitzke James Cook University School of Engineering and Physical Sciences

April 2010 – VER2.0



James Cook University School of Engineering and Physical Sciences Culvert Fishway Planning and Design Guidelines Part A – About These Guidelines


Contents

1	PURPOSE AND SCOPE	1
2	FISH MIGRATION BARRIERS AND PROVISIONS FOR FISH PASSAGE	2
3	OUTLINE OF CULVERT FISHWAY R & D PROGRAM	4
4	KEY KNOWLEDGE GAPS AND ONGOING R & D PRIORITIES	7
5	USING THESE GUIDELINES FOR FISH PASSAGE PLANNING AND DESIGN	8
6	BIBLIOGRAPHY	10

2 FISH MIGRATION BARRIERS AND PROVISIONS FOR FISH PASSAGE

Barriers to fish migration at road crossings and other waterway structures can severely deplete fish populations and alter fish species diversity within a catchment by obstructing migration to critical spawning or growth habitats. Many opportunities are available for practitioners and managers to develop innovative solutions and multipurpose designs for fishway facilities at culverts and other structures in order to provide for fish passage, hydraulic capacity, transport function, operation and amenity values.

Freshwater fish provide significant commercial, recreational and traditional cultural values for humans, play a major role in the physical and biological function of aquatic ecosystems, and represent significant biodiversity and conservation values for streams. Migration is a natural process for most freshwater fish as they fulfil crucial life cycle stages such as adult spawning and juvenile growth dispersal. Whereas large structures such as dams and weirs represent significant fish migration barriers throughout Australia, obstructions to fish movement at road-waterway crossings are also extensive and severe (Harris 2001). Additionally, barriers occur at other structures such as flood gates, tide gates, control structures and drop boards (Box A1.1).

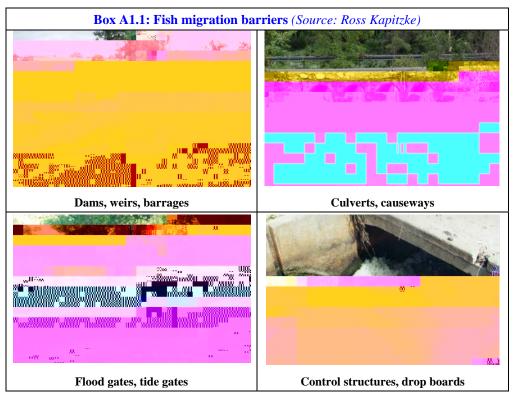

Road culverts and other waterway structures commonly present hydraulic barriers to upstream fish passage as a result of high velocities, excess turbulence, shallow water depths, excessive water surface drops, channel simplification and lack of resting places (see *Guidelines Part C* – *Fish Migration Barriers and Fish Passage Options*). In addition to road culverts, fish migration barriers can also occur at bridge crossings and other constructed waterways where channelisation, grade control or other structures may produce adverse hydraulic conditions due to increased velocities, channel simplification or excessive water surface drops.

Provision of fish passage at road crossings and other structures is a significant natural resource management issue to be addressed in the design of culverts, causeways and other waterway structures. It is also an important research and development topic for engineers, biologists and others. Fish passage design requires a change from conventional road drainage design practice, which has focused on the transport and drainage functions of crossings and primary objectives relating to flood capacity, structure integrity and stream stability. In meeting these conventional requirements, designers have usually maintained high velocities for discharge capacity in culvert


design. This has brought about extensive problems for fish passage, where the objectives are to achieve low velocities, clear fish pathways, and diverse streambed habitat.

Water velocities in culverts and artificial channel sections are usually much higher and more uniform than those in natural channels, where stream meandering, pools and riffles, boulders and other substrate and in-channel form provide diverse patterns of slow or fast velocities suited to fish. Water surface drops at culvert outlets and at grade control structures in constructed waterways are also commonly more severe than in natural channel riffles (Box A1.2). For conditions other than deep slow moving water through the culvert barrel, plain culverts are rarely suited to fish swimming and passage capabilities, particularly for small fish.

Solutions to the ubiquitous problem of fish migration barriers at road crossings have not been firmly established for Australian streams and fish species. Culvert fishway technology from northern hemisphere environments is not directly transferable to local conditions because of vastly different stream hydrology (e.g. fish passage design discharge) and fish movement characteristics (e.g. swimming ability), as well as different culvert structures (e.g. concrete box and pipe culverts compared with corrugated steel pipes).

Very few examples exist in Australia where appropriate provisions for fish passage have been made, either as remediation of existing fish migration barriers or as mitigation of barrier effects at new crossings. Many of the techniques considered lead to expensive designs involving large waterway cross sections in order to achieve low velocities for fish, whilst others are speculative and unproven, commonly failing to meet multipurpose requirements relating to fish passage, drainage, transport, amenity and cost. For many waterways, including some with significant aquatic habitat and fish movement corridor values, conservative design approaches using bridges or arches in lieu of culverts will be unnecessarily expensive and may not be warranted. Furthermore, speculative attempts such as placing rocks as ad hoc roughening elements within the culvert barrels, are often unsubstantiated, and are potentially counter productive.

These issues are addressed in these *Guidelines*, which propose an ecohydraulics design approach that assesses fish passage along with other multipurpose design requirements for the site. A range of solutions are outlined, including incorporation of fish passage facilities into culverts and other waterway structures in order to achieve aquatic fauna connectivity.

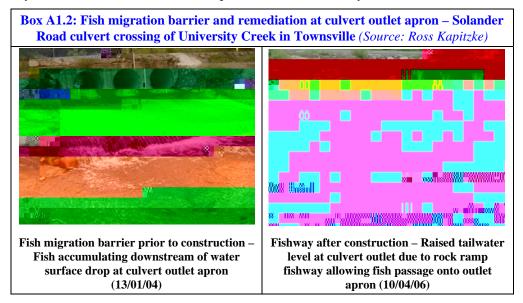

Box A1.3: Prototype fishways on University Creek in Townsville (Source: Ross Kapitzke)			
	University Creek is the largest and least altered tributary entering the lower reaches of Ross River in Townsville, and represents a significant corridor for terrestrial and aquatic fauna connecting Ross River with Mount Stuart and adjoining mountain ranges.		
	The creek provides natural spawning and growth habitat during wet season conditions for up to 13 native fish species, including Plotosid Catfish, Purple Spotted Gudgeon and Rainbowfish.		
	University Creek is a substantial natural asset on the JCU campus, providing an excellent field laboratory for research and teaching, including physical and biological monitoring of fish passage.		
University Creek on JCU campus: Intermittent pool habitat for fish in upstream reaches (25/03/06)			
	The Discovery Drive prototype offset baffle fishway was developed in 2002 and first substantial testing undertaken in 2004.		
	The main hydraulic barriers to be overcome at the crossing are high velocities in the culvert barrel, shallow water depths at low flows, regular culvert cross section and lack of resting place.		
	The fishway components installed at the site include the offset baffle fishway for box culverts within the culvert barrel.		
	Monitoring facilities at the site include access ladders, platforms, gauge boards, flow control boards, fishway fences and cage.		
Prototype Fishway #1: Discovery Drive offset baffle fishway for box culverts (-/01/04)			
	Douglas Arterial Project prototype rock ramp fishway was		

Douglas Arterial Project prototype rock ramp fishway was developed in 2004, with the first testing undertaken in 2005.

The main hydraulic barriers to be overcome as mitigation of the effects of channelisation are high velocities, shallow water depths,

Box A1.4: Hydraulic laboratory test facilities and fishway models at JCU (<i>Source: Ross Kapitzke</i>)		
	scale models of the box culvert and pipe culvert prototype fishways on University Creek are established in the hydraulics test flume	
	various alternative fishway components at 1:5 scale (box) and 1:3.3 scale (pipe) are tested in the culvert model	
	laws of similitude are applied to transfer values between model and prototype, with results applicable to prototypes of various size.	
	velocity profiles are measured with a miniature propeller meter for various water depths and discharges, and flow patterns are observed using die tracers and other visualisation techniques	

VER2.0 -/04/10

5 USING THESE GUIDELINES FOR FISH PASSAGE PLANNING AND DESIGN

options and their suitability for the site are examined in terms of fishway hydraulics, attraction flows, effectiveness and expected performance characteristics of the fishway, and the layout and configuration of the adopted fishway facility is discussed. Site scale design for fish passage is illustrated through the University Creek Solander Road and Bruce Highway Corduroy Creek to Tully case study projects.

Part F – Baffle Fishways for Box Culverts presents baffle fishway design options for box culverts, and describes culvert and fishway configuration and hydraulics. Configurations, design principles and criteria for the offset baffle fishway and the corner "EL" baffle fishway for box culverts are outlined. Baffle fishways for box culverts are illustrated through the University Creek Discovery Drive and Bruce Highway Corduroy Creek to Tully case study projects.

Part G – Baffle Fishways for Pipe Culverts presents baffle fishway design options for pipe culverts, and describes culvert and fishway configuration and hydraulics. Configurations, design principles and criteria for the offset baffle fishway and the corner "Quad" baffle fishway for pipe culverts are outlined. Baffle fishways for pipe culverts are illustrated through the University Creek Solander Road case study project.

Part H – Rock Ramp Fishways for Open Channels describes fishway configuration, hydraulics and fish passage characteristics, and outlines design principles and criteria and construction aspects for rock ramp fishway design. Rock ramp and rock ramp cascade fishways are illustrated through the University Creek Douglas Arterial Road and Solander Road case study projects.

Part I – Design Drawings for Fishway Projects provides example designs for fishway projects undertaken through the University Creek prototype fishways at Discovery Drive, Solander Road and Douglas Arterial Road, and the Bruce Highway Corduroy Creek to Tully case study project.

6 **BIBLIOGRAPHY**

Harris, J. 2001, "Fish passage in Australia: Experience, challenges and projections", *Proceedings of Third Australian Technical Workshop on Fishways*, Sunshine Coast, Australia, August 30-31, 2001, pp 1-17.
Kapitzke, I.R. 2006a, *Bruce Highway Corduroy Creek to Tully planning study Provisions for fish passage* – *Road corridor scale Assessment Task 1A*, report to Maunsell Australia and Department of Main Roads.
Kapitzke, I.R. 2006b, *Discovery Drive offset baffle fishway for box culverts (Prototype Fishway # 1): Case study project design and prototype monitoring report to April 2005*, report to Dept of Main Roads.
Kapitzke, I.R. 2007a, *Bruce Highway Corduroy Creek to Tully High School Provisions for fish passage – Preliminary Design Assessment Tasks 1B and 2*, report to Maunsell Australia and Dept of Main Roads.
Kapitzke, I.R. 2007b, *Discovery Drive corner baffle fishway for box culverts (Prototype Fishway # 4): Case study project design and prototype monitoring report to April 2005*, report to Dept of Main Roads.
Kapitzke, I.R. 2007c, *Solander Road pipe culvert fishway (Prototype Fishway # 3): Case study project design and prototype monitoring report to April 2006*, report to Dept of Main Roads.
Kapitzke, I.R. 2007c, *Solander Road pipe culvert fishway (Prototype Fishway # 3): Case study project design and prototype monitoring report to April 2006*, report to Dept of Main Roads.
Kapitzke, I.R. 2007c, *Solander Road pipe culvert fishway (Prototype Fishway # 3): Case study project design and prototype monitoring report to April 2006*, report to Dept of Main Roads.
Kapitzke, I.R. 2007c, *Solander Road pipe culvert fishway (Prototype Fishway # 3): Case study project design and prototype monitoring report to Department of Main Roads.*

Katopodis, C. 1999, "Sustaining fish migrations: Swimming performance and fish passage/exclusion methods", *Proceedings of Nordic Conference on Fish Passage*, Oslo, Norway.

Ross Kapitzke James Cook University School of Engineering and Physical Sciences April 2010 – VER2.0